


CAT6A Shielded 19-Inch 1U Patch Panel, Dual IDC

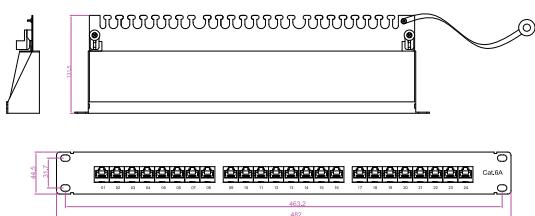

Environmental Characteristics

Storage	-40°C to +70°C
Operation	20°C to 60°C

Electrical Characteristics

Current Rating	1.5 AMP
Contact Resistance	100 Milliohms Max. @500 VDC.
Insulation Resistance	1000 Megaohms Min.
Insulation Strength	750 VAC RMS 60Hz, 1Min

Mechanical Characteristics

IDC Housing Material	PBT	
Panel Frame Material	SPCC, Black or Industrial Grey Electrostatic Powder Coating	
RJ45 Jack Life	750 Times Min	
IDC Life	200 Times Min	
Contact Material	Phosphor Bronze Stamp Pin	
	Thickness	0.30mm
IDC Contact Material	Phosphor Bronze	
	Nickel Plating	
Wire	AWG 23~24	

Ordering Information

P/N	Description	Package
E6A24SL-PM-BK	CAT 6A Shielded 19-Inch 1U Patch Panel, Dual IDC	20 PCS/CTN

