

CAT 6, 24 Ports Shielded 19inch, 1u Patch Panel, Dual IDC

Reference Standard- Comply with TIA/EIA 568C.2

Environmental Characteristics


Storage	-40°C to +70°C
Operation	20°C to 60°C

Electrical Characteristics

Current Rating	1.5 AMP
Contact Resistance	100 Milliohms Max. @500 VDC.
Insulation Resistance	1000 Megaohms Min.
Insulation Strength	750 VAC RMS 60Hz, 1Min

Mechanical Characteristics

IDC Housing Material	PBT
Panel Frame Material	SPCC, Black or Industrial Grey Electrostatic Powder Coating
RJ45 Jack Life	750 Times Min
IDC Life	200 Times Min
Contact Material	Phosphor Bronze Stamp Pin
	Thickness 0.30mm
IDC Contact Material	Phosphor Bronze
	Nickel Plating
Wire	AWG 23~24

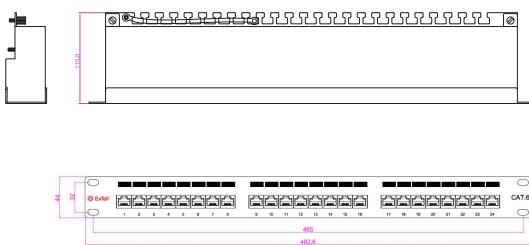

Ordering Information

Model	Description
E6X24SL-PM-BK	CAT6 24 Port Shielded 19 inch 1u Patch Panel Dual IDC, Black

