


CAT6A RJ-45 180 Degree Shielded KS Jack

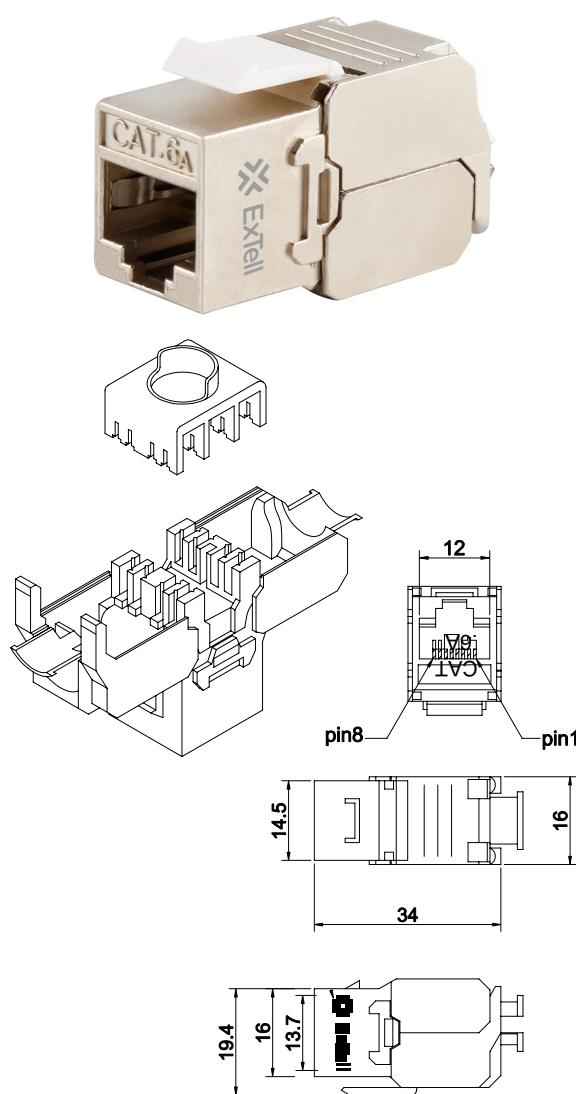

Environmental Characteristics

Storage	-40°C to +85°C
Operation	0°C to 70°C

Electrical Characteristics

Voltage Rating	125 VAC RMS
Current Rating	1.5 AMP
Contact Resistance	100 Milliohms Max. @500 VDC.
Insulation Resistance	1000 Megaohms Min.
Insulation Strength	750 VAC 60Hz, 1Min

Mechanical Characteristics

Housing Material	Zinc Alloy	
Insert Material	PBT	
PBC Material	FR-4	
	Thickness	1.6mm
Contact Material	Phosphor Bronze Stamp Pin	
	Thickness	0.35mm
IDC Contact Material	Phosphor Bronze	
	Thickness	50-80u
	Nickel Plating	
Wire	AWG 22~26	

Ordering Information

Model	Description
EK6AS180-WH	CAT6A RJ-45 180 Degree Shielded KS Jack, Metallic

