


## ExTell CAT6 180° Unshielded Toolless Keystone Jack

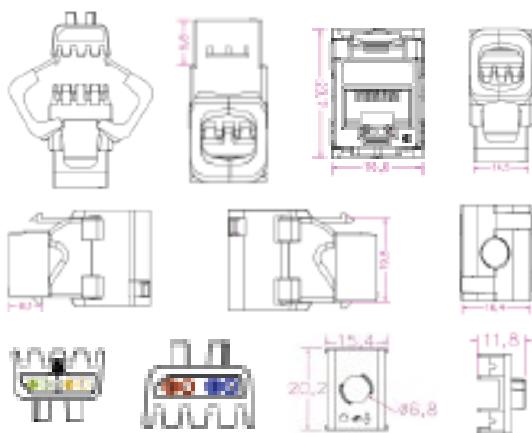

### Physical Characteristics

Insulation Resistance	500 Megaohms Min
DC/AC	DC 100V/AC
Current Rating	1.5Amps
(UTP) DC Resistance	200 Megaohms Min
Contact Resistance	20 Megaohms Min

### Environmental Characteristics

Mating Cycles	750 cycles minimum
IDC Mating Cycles	200 cycles minimum
Contact Compatability	Accommodate 23 to 26 AWG solid
Operation Temperature	0°C to 70°C
Storage Temperature	0°C to 70°C

### Mechanical Characteristics

Housing Material	PC UL94V-0
Insert Material	PC UL94V-0
IDC Housing	PC UL94V-0
PBC Material	FR-4
Contact Material	Phosphor Bronze
	Thickness 0.35mm
	Gold Plating 50u
IDC Contact Material	Phosphor Bronze C5191R-H
	Nickel Plating 100u

### Ordering Information

Model	Description
EK6XU180-T-BL	CAT 6 180° Unshielded Toolless Keystone Jack, Blue
EK6XU180-T-BK	CAT 6 180° Unshielded Toolless Keystone Jack, Black
EK6XU180-T-WH	CAT 6 180° Unshielded Toolless Keystone Jack, White

