


Fiber Optic Cables - D Series - Unitube Steel Armored with Steel Wire Strength Member

Reference Standard- IEC 60794

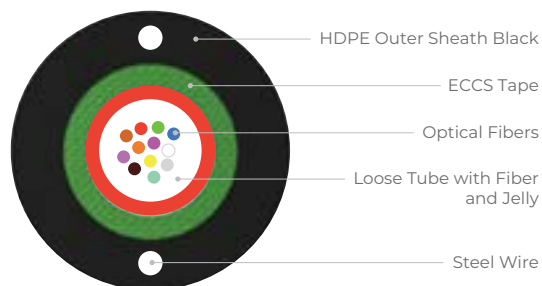

Physical Parameters

Cable length (km)	2 ± 10 %
-------------------	----------

Color Details

Optical Fiber Color	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Pink, Natural as applicable & each have a natural fibre
Loose Tube Color	Natural
Sheath Color	Black

Product Information

Elements	Nos.	Material	Values
Loose Tube			
Optical Fiber	1	ITU-T OM4	1300 nm : ≤ 1.0 dB/Km & 850 nm : ≤ 3.0 dB/Km
Filling Jelly		Thixotropic Jelly	
Loose Tube		PBTP	
Core			
Peripheral Strength Member	2	Steel Wire	Nominal Diameter - 0.6 mm
Cable			
Armoring Tape	1	Corrugated ECCS Tape	
Sheathing		High Density Polyethylene	

Optical Fiber Cable Performance

Mechanical			Environmental		
Max. Tensile Strength		1000 N	Temp. Performance	Installation	-30°C to +70°C
Minimum Bend Radius	Short Term	10 x D		Service	-30°C to +70°C
	Long Term	20 x D		Storage	-30°C to +70°C
Crush Resistance		1500 N / 10cm			
Impact Strength		10 Nm.			
Torsion		± 180°			



Fiber Optic Cables - D Series - Unitube Steel Armored with Steel Wire Strength Member

Reference Standard- IEC 60794

Cable Construction Details

Fiber Count	No. of Fiber Bundle	No. of Fiber per tube	Overall Cable Diameter ^p	Cable Weight (Kg/Km)
4	---	4	6.5 ± 0.5 mm	50 ± 10 Kg
6	---	6	6.5 ± 0.5 mm	50 ± 10 Kg
8	---	8	6.5 ± 0.5 mm	50 ± 10 Kg
12	---	12	6.5 ± 0.5 mm	50 ± 10 Kg

Ordering Information

No. of Cores	OS2	OM3	OM4
2	ES2DLPUA-FC002	EM3DLPUA-FC002	EM4DLPUA-FC002
4	ES2DLPUA-FC004	EM3DLPUA-FC004	EM4DLPUA-FC004
6	ES2DLPUA-FC006	EM3DLPUA-FC006	EM4DLPUA-FC006
8	ES2DLPUA-FC008	EM3DLPUA-FC008	EM4DLPUA-FC008
12	ES2DLPUA-FC012	EM3DLPUA-FC012	EM4DLPUA-FC012
24	ES2DLPUA-FC024	EM3DLPUA-FC024	EM4DLPUA-FC024