


OM3 Fiber Optic UPC Duplex Patch Cords

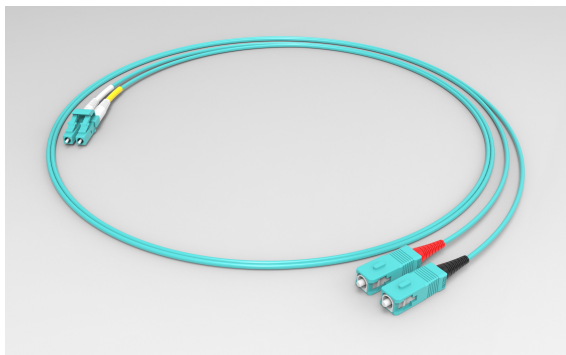

Features

- Seamless Connectivity
- OM3 Multi Mode

Materials

- Connector Housing: High Quality Plastic, Resistant to corrosion and high temperature
- Ferrule: High Quality Ceramic Ferrule

Additional Features

- SC, LC, ST, FC and MTRJ connectors
- 900 pm tight buffer
- Simplex & Duplex assemblies available with clips (SC & LC)
- Armored option available
- Different connector performance range for specific application
- Fully Automated preparation and polishing process

Applications

- High speed and legacy networks including Gigabit Ethernet, Fast Ethernet
- Data Center cabling in data networks including backbone, riser & horizontal

Technical Specification

Parameter	SM PC Connectors	SM APC Connectors	MM PC Connectors
IL (61300-3-4)	≤ 0.30 dB	≤ 0.30 dB	≤ 0.30 dB
RL (61300-3-6)	≥ 50 dB	≥ 60 dB	≥ 25 dB

Ordering Information

OM3 UPC Duplex	SC - SC	LC - SC	LC - LC
1m	EM3D03UL-PC01-AQ	EM3D06UL-PC01-AQ	EM3D04UL-PC01-AQ
2m	EM3D03UL-PC02-AQ	EM3D06UL-PC02-AQ	EM3D04UL-PC02-AQ
3m	EM3D03UL-PC03-AQ	EM3D06UL-PC03-AQ	EM3D04UL-PC03-AQ
5m	EM3D03UL-PC05-AQ	EM3D06UL-PC05-AQ	EM3D04UL-PC05-AQ
10m	EM3D03UL-PC10-AQ	EM3D06UL-PC10-AQ	EM3D04UL-PC10-AQ
15m	EM3D03UL-PC15-AQ	EM3D06UL-PC15-AQ	EM3D04UL-PC15-AQ
20m	EM3D03UL-PC20-AQ	EM3D06UL-PC20-AQ	EM3D04UL-PC20-AQ

