


# ExTell Spectra Rack Tower Series 1:1 Phase 1.0PF, 1 To 3KVA, Online UPS

Reference Standard- Safety - IEC/EN62040-1, IEC/EN62477-1, EMC - IEC/EN62040-2, IEC61000-4-2, IEC61000-4-3, IEC61000-4-4, IEC61000-4-5, IEC61000-4-6, IEC61000-4-8

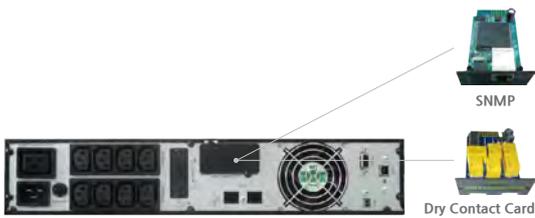

## Features

- Rack/Tower convertible design
- Online double conversion with full digital control
- Wide input voltage range: 110~300Vac
- Input power factor 0.99 with PFC
- Selectable output voltage: 208/220/230/240Vac
- Smart charger design for optimized battery performance
- Emergency power off function (EPO)
- ECO mode operation for energy saving
- Generator compatible
- Hot-Swappable battery design
- Cold start
- Intelligent fan speed regulation
- Load segment settable (Optional)
- Versatile LCD human-computer interface
- Power Factor - 1.0
- Multiple communication interface:RS232 (USB/EPO/Dry contact / SNMP card optional)
- Multiple protection function:short-circuit,overload,overheat, battery overcharge and overdischarge,output low voltage and fan fault alarm

## Accessories

<p>Optimized Battery Configuration 7Ah/9Ah (12V)</p>	<p>Multifunctional Bracket</p>	<p>Battery Cabinet (Optional)</p>



# ExTell Spectra Rack Tower Series 1:1 Phase 1.0PF, 1 To 3KVA, Online UPS

Reference Standard- Safety - IEC/EN62040-1, IEC/EN62477-1, EMC - IEC/EN62040-2, IEC61000-4-2, IEC61000-4-3, IEC61000-4-4, IEC61000-4-5, IEC61000-4-6, IEC61000-4-8

## Technical Specifications

Model	E001SIR31	E002SIR31	E003SIR31
Capacity	1000VA / 1000W	2000VA / 2000W	3000VA / 3000W

### Input

Nominal Voltage	208/220/230/240Vac
Input Voltage Range	110~300Vac (176~280Vac @ 100% load)
Frequency Range	40~70Hz (50/60Hz Auto-Sensing)
Power Factor	≥ 0.99

### Output

Output Voltage	208/220/230/240Vac	
Power Factor	0.9PF	
Voltage Regulation	± 1%	
Output Frequency	Line Mode	46~54Hz or 56~64Hz
	Battery Mode	(50/60 ± 0.1%)Hz
Crest Factor	3:1	
Harmonic distortion (THDv)	≤ 3% Linear load	
	≤ 5% Non linear load	
Transfer Time	AC Mode to Battery Mode	0ms
	Inverter to Bypass	4ms (Typical)
Waveform (Batt. Mode)	Pure Sinewave	

### Efficiency

AC Mode	89%	91%	92%
Battery Mode	85%	87%	88%

### Battery

Battery Number	2	4	6
Capacity (Standard unit)	9Ah / 12V		
Typical Recharge Time	4 hours (to 90% of full capacity)		
Charging Voltage	27.4 Vdc ±1%	54.8 Vdc ± 1%	82.2Vdc ± 1%
Charging Current (Max)	1A	1A	1A



# ExTell Spectra Rack Tower Series 1:1 Phase 1.0PF, 1 To 3KVA, Online UPS

Reference Standard- Safety - IEC/EN62040-1, IEC/EN62477-1, EMC - IEC/EN62040-2, IEC61000-4-2, IEC61000-4-3, IEC61000-4-4, IEC61000-4-5, IEC61000-4-6, IEC61000-4-8

## Technical Specifications

Model	E001SIR31	E002SIR31	E003SIR31
Capacity	1000VA / 1000W	2000VA / 2000W	3000VA / 3000W

### Indicators

LED Display	Line mode, Bat. mode, ECO mode, Bypass mode, Battery low voltage, Overload & UPS fault
LCD Display	Input voltage, Input frequency, Output voltage, Output frequency, Load percentage, Battery voltage, Inner temperature & Remaining battery backup time

### Alarm

Battery Mode	Beeping every 4 seconds
Battery Low	Beeping every second
Overload	Beeping twice every second
Fault	Continuously sounding

### Physical

Dimension W x D x H (mm)	440 x 460 x 86.5	440 x 460 x 86.5	440 x 600 x 86.5
Net Weight (kgs)	14	19.5	26

### Environment

Operating Temperature	0°C~40°C
Storage Temperature	-25°C~55°C
Humidity Range	20~95%RH @ 0~40°C (Non condensing)
Altitude	<1500m, derating required when >1500m
Noise Level	<50dB at 1 Meter

